





Corrugated separator

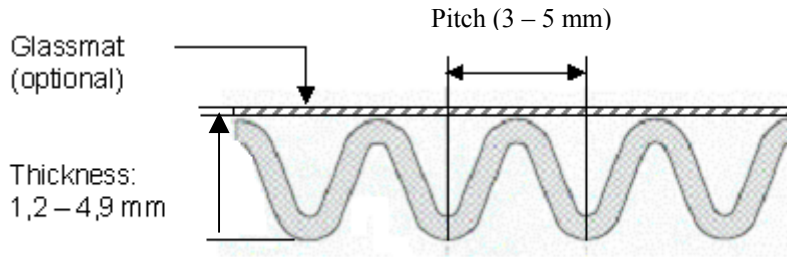

Sinusoidal corrugation (S)

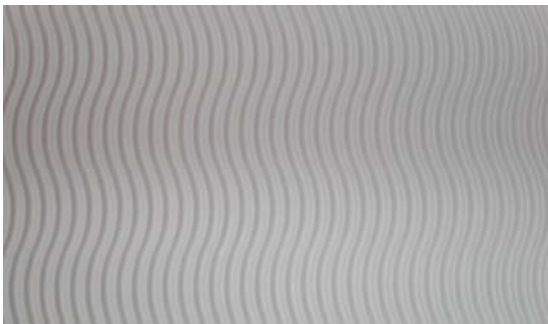


Straight corrugation (T)



Nomenclature :

Designation	Pitch spacing (in mm)	Separator thickness
K	3	<u>≤ 2,4 mm</u>
L	4	<u>> 2,4 mm</u>
M	5	<u>> 3,5 mm</u>

Example:

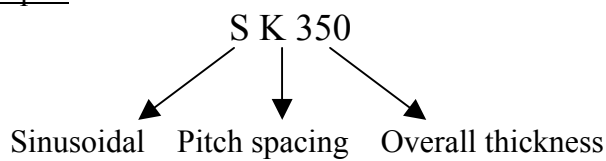

S = Sinusoidal ribs
 K = Pitch spacing of 3 mm
 350 = 3.50 mm overall thickness

The separators can be laminated with glassmat (e.g., SGL); G stands for glassmat.
 Width and length are according to the customer's request.