




# Ribbed separator

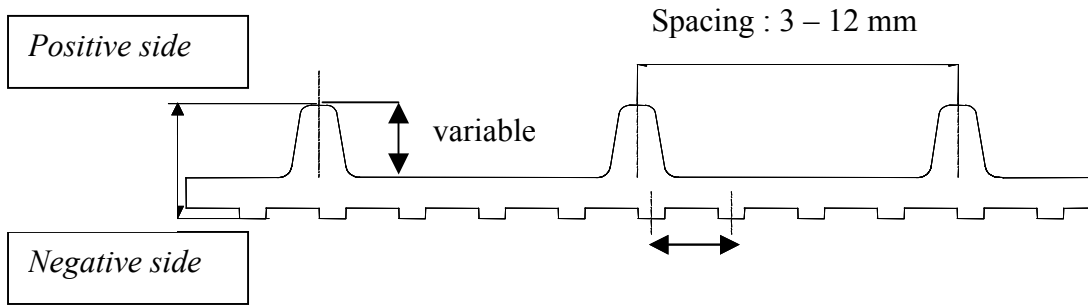

## Positive side

### Diagonal ribs



Rib spacing (in mm)	Designation
12	DW
6	D

### Straight ribs



Rib spacing (in mm)	Designation
12	A
6	T
1.7	C
3	N
flat	F


## Negative side



Rib spacing (in mm)	Designation
6	T
3	N
1.7	C
flat	F

## Nomenclature

Example:

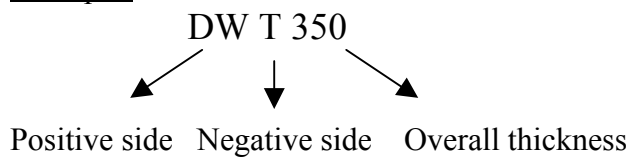

DW = Diagonal positive rib spacing of 12 mm  
 T = Straight negative rib spacing of 6 mm  
 350 = 3.50 mm overall thickness

The separators can be laminated with glassmat either on positive (e.g., DWGT) or on negative side (e.g., DWTG) G stands for glassmat.

Dimension : width up to 840 mm ; length up to 2M