


## Corrugated separator



### Sinusoidal corrugation (S)

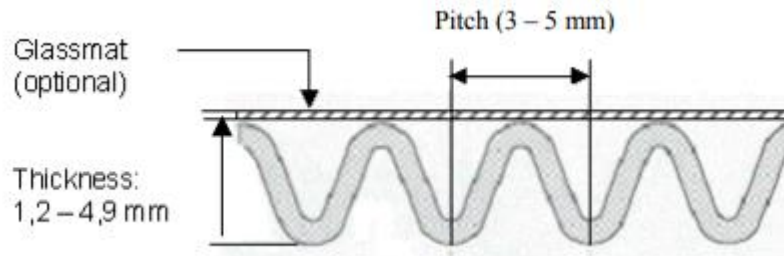


### Straight corrugation (T)



## Nomenclature :

Designation	Pitch spacing (in mm)	Separator thickness
K	3	<u>≤ 2,4 mm</u>
L	4	<u>&gt; 2,4 mm</u>
M	5	<u>&gt; 3,5 mm</u>

### Example:

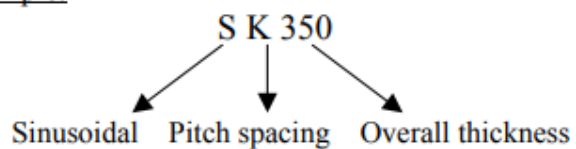

S = Sinusoidal ribs  
 K = Pitch spacing of 3 mm  
 350 = 3.50 mm overall thickness

The separators can be laminated with glassmat ( e.g., SGL); G stands for glassmat.  
 Width and length are according to the customer's request.